



5TM



Designed for very low torque (below 7.5 mN.m) applications.

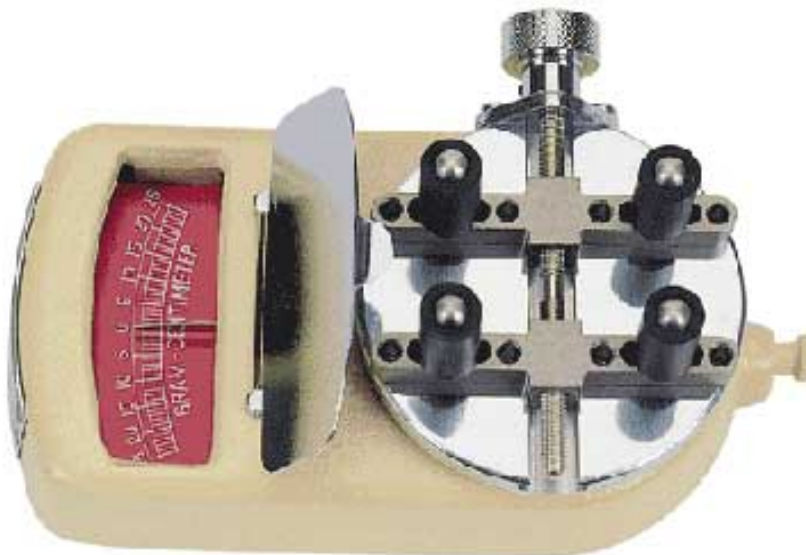

Select proper model according to unit of measure as following color code :

S.I. = Metric = American =

Accuracy $\pm 2\%$

Model			Torque Range						Overall Length	Overall Width	Overall Height	Chuck Grip	Weight Approx.
S.I.	Metric	American	Min.-Max.			Graduation							
			S.I.	Metric	American	S.I.	Metric	American					
5TM1MN	5-OT10	5-TM015Z	mN. m 0-1	gf.cm 0-10	in.oz 0-0.15	mN. m 0.05	gf.cm 0.5	in.oz 0.005	122 mm 4 13/16 in	76.5mm 3 in	59 mm 2 5/16 in	Ø6 ~ Ø58 1/4-2 9/32 in	0.3 kg 1 21/32 lb.
5TM1.5MN	5-OT15	-	0-1.5	0-15	-								
5TM2.5MN	5-OT25	5-TM035Z	0-2.5	0-25	0-0.35	0.1	1	0.01					
5TM5MN	5-OT50	5-TM070Z	0-5	0-50	0-0.70	0.2	2	0.02					
5TM7.5MN	5-OT75	5-TM1Z	0-7.5	0-75	0-1								

NOTE

- 5TM is supplied without memory pointer.
- When calibrating the 5TM, ask Tohnichi sales office for assistance.



Print



Close

